


## BIANCOFLASH EMBOSSED

### PRODUCT DESCRIPTION

Embossed white and ivory paper and boards made with FSC™ pulps from certified and controlled sources. Available in 3 grammages, 2 colours, 1 size.

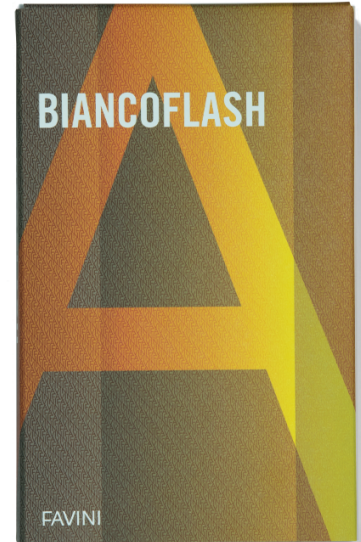

### TECHNICAL DATA

PREMIUM	METHOD		+/-	LN 2/s 120 g/m <sup>2</sup>	LN 2/s 250 g/m <sup>2</sup>	LN 2/s 300 g/m <sup>2</sup>	FN 2/s 120 g/m <sup>2</sup>	FN 2/s 250 g/m <sup>2</sup>	HX 2/s 250 g/m <sup>2</sup>	HL 1/s 250 g/m <sup>2</sup>
BASIC WEIGHT	ISO 536	g/m <sup>2</sup>	5%	120	250	300	120	250	250	250
CALIPER	ISO 534	µm	10%	165	290	365	140	260	275	290
BULK	ISO 534	cm <sup>2</sup> /g	-	1,40	1,27	1,23	1,15	1,10	1,10	1,10
CIE WHITENESS	ISO 11475	%	3	168	168	168	168	168	168	168
MOISTURE CONTENT	ISO 287	%	1,0	7,0	7,0	7,0	7,0	7,0	7,0	7,0

IVORY	METHOD		+/-	LN 2/s 250 g/m <sup>2</sup>	LN 2/s 300 g/m <sup>2</sup>	FN 2/s 250 g/m <sup>2</sup>
BASIC WEIGHT	ISO 536	g/m <sup>2</sup>	5%	250	300	350
CALIPER	ISO 534	µm	10%	290	340	268
BULK	ISO 534	cm <sup>2</sup> /g	-	1,16	1,13	1,07
MOISTURE CONTENT	ISO 287	%	1,0	7,0	7,0	7,0

Special makings are available upon request.



RECYCLABLE



BIODEGRADABLE



ELEMENTAL  
CHLORINE  
FREE



ACID



LONG-LIFE  
ISO 9706



SAFETY TOYS



REACH  
COMPLIANCE



HEAVY METAL  
COMPLIANT



PAP



PAP



The mark of  
responsible forestry

Biancoflash Embossed conforms to ISO 9706 requirements for permanence and is suitable for applications requiring "Acid Free" paper. It is biodegradable and recyclable.

## PRINTING AND FINISHING RECCOMENDATIONS

<b>INKS</b>	To ensure good drying, Biancoflash Embossed papers should be printed with good quality semi-fresh inks. The drying process can be slightly accelerated by adding extra desiccant.
<b>PRINTING PRESSURE</b>	The embossing requires proper printing pressure settings.
<b>BLANKETS</b>	For a good graphic impression, use compressible blankets.
<b>SCREENS</b>	For the offset printing process a screen value of 150 lpi is recommended. For dry offset printing this can be slightly higher, for example 200 lpi. For heavier graphic elements and higher densities, sufficient powder should be applied.
<b>DRYING TIME</b>	Allow 24 hours drying time after printing.
<b>FINISHING</b>	Prescoring is recommended for board weights and when folding against the grain direction.
<b>PRINTABILITY AND RUNNABILITY</b>	Every method of printing, embossing, punching, die cutting, creasing, laminating and UV varnishing is possible.
<b>NOTE</b>	Due to its hygroscopic nature, paper can show curl issues if not conditioned properly. To avoid any issue, we recommend to store the paper closed in its original wrap inside the printing area for at least 24-48 hours. After this conditioning time, the wrapping can be open and the paper can be utilized.

> Please contact our technical department for further suggestions.

## MILL ACCREDITATION | Rossano Veneto VI - Italy

CORPORATE QUALITY MANAGEMENT STANDARD | UNI EN ISO 9001

ENVIRONMENTAL MANAGEMENT STANDARD | UNI EN ISO 14001

OCCUPATIONAL HEALTH AND SAFETY MANAGEMENT STANDARD | UNI EN ISO 45001

ECO-MANAGEMENT AND AUDIT SCHEME CE 1221/2009 | EMAS

We care about the environment: [www.favini.com/en/sustainability](http://www.favini.com/en/sustainability)