

## CONTACT PACK

### PRODUCT DESCRIPTION

Contact Pack is a range of paper and board made with high quality virgin pulp. Optimized for use as folding boxes and cases, tags and POS materials as well as a wrap material over rigid boxes. Ideal for calendars, covers, envelopes and greeting cards. Available in White and Ivory.

Contact Pack Recycled contains 50% post-consumer waste (PCW). It is the perfect choice for sustainable packaging.



### TECHNICAL DATA

#### THE FOLLOWING TECHNICAL DATA REFERS TO WHITE AND IVORY

	METHOD		+/-	120 g/m <sup>2</sup>	200 g/m <sup>2</sup>	250 g/m <sup>2</sup>	300 g/m <sup>2</sup>	360 g/m <sup>2</sup>	450 g/m <sup>2</sup>
BASIC WEIGHT	ISO 536	g/m <sup>2</sup>	5%	120	200	250	300	360	450
THICKNESS	ISO 534	µm	5%	168	280	350	420	500	630
BULK	ISO 534	cm <sup>3</sup> /g	-	1,40	1,40	1,40	1,40	1,39	1,40
CIE WHITENESS*	ISO 11475	%	3	145	145	145	145	145	145
STIFFNESS MD (15°/50mm)	ISO 2493-1	mN	-	-	>80	>120	>250	>380	>700
STIFFNESS CD (15°/50mm)	ISO 2493-1	mN	-	-	>40	>60	>110	>170	>350
MOISTURE CONTENT	ISO 287	%	1,0	6,5	6,5	6,5	6,5	6,5	6,5

\*Refers to White shade. The data for the 120gsm is coming soon.



RECYCLABLE



BIODEGRADABLE



ECF  
ELEMENTAL  
CHLORINE  
FREE



FREE  
ACID



LONG-LIFE  
ISO 9706



EN71  
SAFETY TOYS



94/62  
EC  
HEAVY METAL  
COMPLIANT



REACH  
COMPLIANT



PAP  
21



PAP  
22




FSC  
www.fsc.org  
FSC® C001810

The mark of  
responsible forestry

## THE FOLLOWING DATA REFERS TO RECYCLED

	METHOD		+/-	120 g/m <sup>2</sup>	300 g/m <sup>2</sup>	360 g/m <sup>2</sup>
<b>BASIC WEIGHT</b>	ISO 536	g/m <sup>2</sup>	5%	120	300	360
<b>THICKNESS</b>	ISO 534	µm	5%	168	420	500
<b>BULK</b>	ISO 534	cm <sup>2</sup> /g	-	1,40	1,40	1,39
<b>CIE WHITENESS*</b>	ISO 11475	%	3	136	136	136
<b>STIFFNESS MD (15°/50mm)</b>	ISO 2493-1	mN	-	-	>250	>380
<b>STIFFNESS CD (15°/50mm)</b>	ISO 2493-1	mN	-	-	>110	>170
<b>MOISTURE CONTENT</b>	ISO 287	%	1,0	6,5	6,5	6,5

Special makings are available upon request.

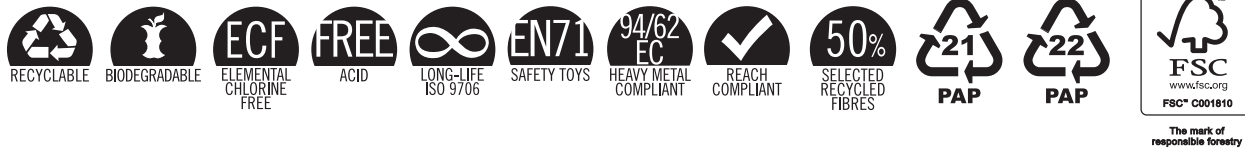

Contact Pack conforms to ISO 9706 requirements for permanence and is suitable for applications requiring "Acid Free" paper. It is biodegradable and recyclable.

## PRINTING AND FINISHING RECOMMENDATIONS

- OFFSET PRINTING** ■ We suggest the use of semi-fresh inks. Suitable for traditional or UV lithography. For heavier graphical objects and/or higher densities, apply enough powder. With full coverage print it is suggested to add extra desiccant and/or the use of two printing elements. Moreover, it is suggested to wash the blanket more frequently.
- HP INDIGO DIGITAL PRINTING** ■ Not suitable for HP indigo printing.
- DIGITAL PRINTING** ■ Suitable for dry toner digital printing and ink-jet printing.
- SCREEN PRINTING** ■ Suitable for screen printing.
- RUNNABILITY** ■ Suitable for embossing, punching, die cutting, creasing and hot foil stamping.
- NOTE** ■ Due to its hygroscopic nature, paper can show curl issues if not conditioned properly. To avoid any issue, we recommend to store the paper closed in its original wrap inside the printing area for at least 24-48 hours. After this conditioning time, the wrapper can be opened and the paper can be used.

> Please contact our technical department for further suggestions.

## MILL ACCREDITATION | Rossano Veneto VI - Italy

CORPORATE QUALITY MANAGEMENT STANDARD | UNI EN ISO 9001

ENVIRONMENTAL MANAGEMENT STANDARD | UNI EN ISO 14001

OCCUPATIONAL HEALTH AND SAFETY MANAGEMENT STANDARD | UNI EN ISO 45001

ECO-MANAGEMENT AND AUDIT SCHEME CE 1221/2009 | EMAS

We care about the environment: [www.favini.com/en/sustainability](http://www.favini.com/en/sustainability)