

THE TUBE


PRODUCT DESCRIPTION

Add mood to your communication with this curiously tactile material. Available as a single or double-sided finish of paper and board, it is engineered to give a gorgeous flawless matt effect. The smoothly tactile surface invites you to reach out and explore it, making it the paper ideal for use where it will be touched. Now with added resilience to finger marking.

The Tube Hide, replicates the look and the feel of real leather giving a luxurious touch and matt finish, in 3 intense shades.

New: 4 colours join the collection; a luscious soft Cream, a timeless Jeans shade and a high impact fiery Chili, along with the comeback of our much-loved elegant Red.

The Tube is suitable for most major printing techniques including screen printing and foil blocking. Perfect for adding value and luxury to premium print and packaging applications.

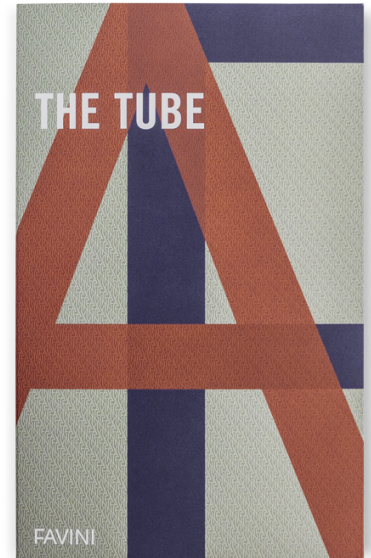

TECHNICAL DATA

	METHOD		+/-	120 g/m ²	260 g/m ²	340 g/m ²
				1/s	2/s	2/s
BASIC WEIGHT	ISO 536	g/m²	5%	120	260	340
THICKNESS	ISO 534	µm	5%	145	310	395
BULK	ISO 534	cm³/g	-	1,21	1,19	1,16

	METHOD		+/-	120 g/m ²	360 g/m ²
				embossed	
BASIC WEIGHT	ISO 536	g/m²	5%	120	360
THICKNESS	ISO 534	µm	5%	-	-

Special makings are available upon request.



PRINTING AND FINISHING RECCOMENDATION

PREPARATION

Keep The Tube in a dry place, avoiding moisture. Once opened, make sure to close the wrapper carefully to protect the remaining sheets. Handle the paper with care. Before printing, **fan the sheets as shown in the instructions included in each pack.**

INKS

To achieve the best drying time, we suggest using an oxidising ink, preferably new and undiluted. Excellent results have also been achieved with UV inks.

BLANKETS

Use compressible blankets. For the Hide variant, we recommend avoiding end-of-life blankets and adjusting the printing pressure.

DRYING TIME

Leave to dry in small stacks (12/20 cm) for 24 to 48 hours after printing.

CREASING

Pre-creasing is advised for heavy weights and in cases folded against the grain.

LAMINATION

For lamination, we advise polyurethane glues. If in doubt, we suggest a test before proceeding.

FOIL

For foil lamination we suggest foils with appropriate thickness to avoid oxidation. We recommend carrying out a compatibility test beforehand when using metallised foils on The Tube black paper.

PRINTABILITY AND RUNNABILITY

Suitable for the main print and finishing techniques. A test is nevertheless always recommended to check the print result before proceeding with the full run.

NOTE

Due to the hygroscopic nature of paper, to avoid curl issues we recommend conditioning the paper by keeping the pallet closed in its original wrap inside the printing area for approximately 24/48 hours, after which the wrapping can be opened and the paper processed.

> Please contact our technical department for further suggestions.

MILL ACCREDITATION | Rossano Veneto VI - Italy

CORPORATE QUALITY MANAGEMENT STANDARD | UNI EN ISO 9001

ENVIRONMENTAL MANAGEMENT STANDARD | UNI EN ISO 14001

OCCUPATIONAL HEALTH AND SAFETY MANAGEMENT STANDARD | UNI EN ISO 45001


ECO-MANAGEMENT AND AUDIT SCHEME CE 1221/2009 | EMAS

We care about the environment: www.favini.com/en/sustainability

BEFORE PRINTING, FAN THE SHEETS AS SHOWN



120 g/m²

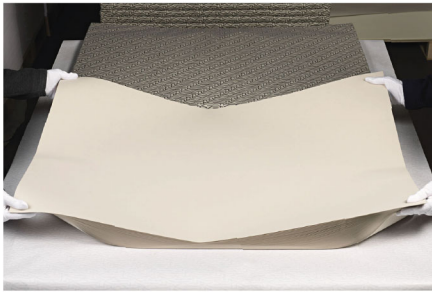

260, 340, 360 g/m²

