
FAVINI

e-mail: rossano@favini.com
Website: www.favini.com

Technical Data Sheet | 18.11.2026

BIANCOFLASH EMBOSSED

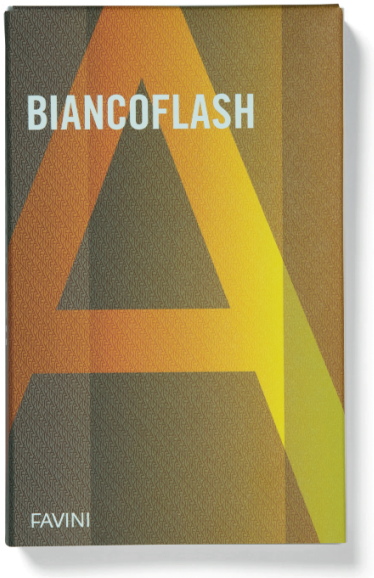

PRODUCT DESCRIPTION

Embossed white and ivory paper and boards made with FSC™ pulps from certified and controlled sources. Available in 3 grammages, 2 colours, 1 size.

TECHNICAL DATA

PREMIUM	METHOD		+/-	LN 2/s 120 g/m²	LN 2/s 250 g/m²	LN 2/s 300 g/m²	FN 2/s 120 g/m²	FN 2/s 250 g/m²	HX 2/s 250 g/m²	HL 1/s 250 g/m²
BASIC WEIGHT	ISO 536	g/m²	5%	120	250	300	120	250	250	250
CALIPER	ISO 534	µm	10%	165	290	365	140	260	275	290
BULK	ISO 534	cm²/g	-	1,40	1,27	1,23	1,15	1,10	1,10	1,10
CIE WHITENESS	ISO 11475	%	3	168	168	168	168	168	168	168
MOISTURE CONTENT	ISO 287	%	1,0	7,0	7,0	7,0	7,0	7,0	7,0	7,0

IVORY	METHOD		+/-	LN 2/s 250 g/m²	LN 2/s 300 g/m²	FN 2/s 250 g/m²
BASIC WEIGHT	ISO 536	g/m²	5%	250	300	350
CALIPER	ISO 534	µm	10%	290	340	268
BULK	ISO 534	cm²/g	-	1,16	1,13	1,07
MOISTURE CONTENT	ISO 287	%	1,0	7,0	7,0	7,0

Special makings are available upon request.

RECYCLABLE · ECF ELEMENTAL CHLORINE FREE PULP · FREE ACID · 25/40 EN PPWR COMPLIANT · 21 PAP · 22 PAP · FSC www.fsc.org FSC® C001810 The mark of responsible forestry

FAVINI

e-mail: rossano@favini.com
Website: www.favini.com

Technical Data Sheet | 18.11.2026

PRINTING AND FINISHING RECCOMENDATIONS

INKS
To ensure good drying, Biancoflash Embossed papers should be printed with good quality semi-fresh inks.
The drying process can be slightly accelerated by adding extra desiccant.

PRINTING PRESSURE
The embossing requires proper printing pressure settings.

BLANKETS
For a good graphic impression, use compressible blankets.

DRYING TIME
Allow 24 hours drying time after printing.

FINISHING
Prescoring is recommended for board weights and when folding against the grain direction.

PRINTABILITY AND RUNNABILITY
Every method of printing, embossing, punching, die cutting, creasing, laminating and UV varnishing is possible.

NOTE
Due to its hygroscopic nature, paper can show curl issues if not conditioned properly.
To avoid any issue, we recommend to store the paper closed in its original wrap inside the printing area for at least 24-48 hours. After this conditioning time, the wrapping can be open and the paper can be utilized.

> Please contact our technical department for further suggestions.

ROSSANO VENETO MILL IS:

REACH COMPLIANT

MILL ACCREDITATION | Rossano Veneto VI - Italy

CORPORATE QUALITY MANAGEMENT STANDARD | UNI EN ISO 9001

ENVIRONMENTAL MANAGEMENT STANDARD | UNI EN ISO 14001

OCCUPATIONAL HEALTH AND SAFETY MANAGEMENT STANDARD | UNI EN ISO 45001

ECO-MANAGEMENT AND AUDIT SCHEME CE 1221/2009 | EMAS

We care about the environment: www.favini.com/en/sustainability