
FAVINI

e-mail: rossano@favini.com
Website: www.favini.com

Technical Data Sheet | 18.11.2026

CLASSY COVERS EVO

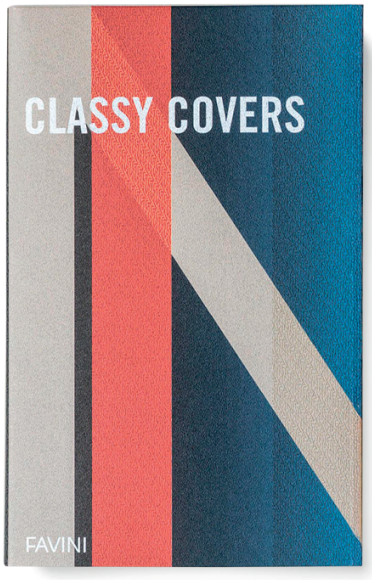

PRODUCT DESCRIPTION

Classy Covers is the perfect embossed covering for a full range of hi-end packaging applications as well as books, binders, folders and more! The papers exceed the high standards required for foldability and scuff resistance and have excellent lightfastness. Each perform beautifully when combined with a variety of print and finishing options such as foil-blocking, silkscreen or embossing.

Our new Evo range introduces four unique embossings across four new colours, curated and expertly crafted for luxury brands. These new editions expand on the existing Classy Covers range to offer outstanding choice and quality to meet all your covering needs.

TECHNICAL DATA

				T1	T3	T5	T6
	METHOD		+/-	115 g/m²			
BASIC WEIGHT	ISO 536	g/m²	5%	115	115	115	115
CALIPER	ISO 534	µm	10%	175	145	137	180
BULK	ISO 534	cm³/g	-	1,52	1,26	1,19	1,57
CIE WHITENESS*	ISO 11475	%	3	128	128	128	128
BREAKING LENGTH LONG	ISO 1924-3	km	≥	3,5	6,2	5,8	2,5
BREAKING LENGTH CROSS	ISO 1924-3	km	≥	2,0	3,7	3,3	2,2
TEAR RESISTANCE LONG	ISO 1974	mN	≥	400	540	500	420
TEAR RESISTANCE CROSS	ISO 1974	mN	≥	420	600	540	450

** Referring to Classy Covers Evo Snow*

FAVINI

e-mail: rossano@favini.com
Website: www.favini.com

Technical Data Sheet | 18.11.2026

Special makings are available upon request.

RECYCLABLE | ELEMENTAL CHLORINE FREE PULP | ACID | PPWR COMPLIANT

REFERS TO CLASSY COVERS EVO CARBON

CARBON BLACK

PAP

FSC www.fsc.org FSC® C001810 The mark of responsible forestry

PRINTING AND FINISHING RECCOMENDATIONS

INKS
To ensure good drying, Classy Covers Evo papers should be printed with oxidizing inks, preferably new and undiluted.
The drying process can be slightly accelerated by adding extra desiccant. For heavier graphic elements and higher densities, sufficient powder should be applied.

BLANKETS
For a good graphic impression, use compressible blankets.

SCREENS
For a good graphic impression, use compressible blankets.

DRYING TIME
Make small sheet pallets and allow at least 24 hours drying time after printing.

FINISHING
Scoring is recommended for board weights and when folding against the grain direction.

PRINTABILITY AND RUNNABILITY
Offset printing, embossing, punching, die cutting, creasing, laminating, hot foil, silk-screen and UV varnishing is possible.

NOTE
Due to its hydroscopic nature, paper can show curl issues if not conditioned properly.
To avoid any issue, we recommend to store the paper closed in its original wrap inside the printing area for at least 24-48 hours. After this conditioning time, the wrapping can be open and the paper can be utilized.

> For particular printing and finishing techniques we recommend to make a test previously. Please contact our technical department for further suggestions.

ROSSANO VENETO MILL IS:

REACH COMPLIANT

MILL ACCREDITATION | Rossano Veneto VI - Italy

CORPORATE QUALITY MANAGEMENT STANDARD | UNI EN ISO 9001

ENVIRONMENTAL MANAGEMENT STANDARD | UNI EN ISO 14001

OCCUPATIONAL HEALTH AND SAFETY MANAGEMENT STANDARD | UNI EN ISO 45001

ECO-MANAGEMENT AND AUDIT SCHEME CE 1221/2009 | EMAS

We care about the environment: www.favini.com/en/sustainability