
FAVINI

e-mail: rossano@favini.com
Website: www.favini.com

Technical Data Sheet | 18.11.2026

COVER LINE

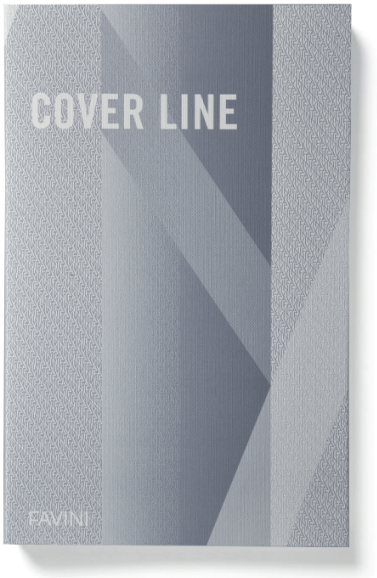

PRODUCT DESCRIPTION

Embossed paper produced with high quality pure ECF (Elementary Chlorine Free) pulps from well managed forests. It is developed for lamination proposes and dedicated to the covering and wrapping material for boxes, rigid folders and rigid cases. It has an excellent opacity and an appropriate scuff resistance.

TECHNICAL DATA

	METHOD		+/-	110 g/m²
BASIC WEIGHT	**ISO 536**	**g/m²**	**5%**	**110**
CALIPER	**ISO 534**	**µm**	**10%**	**155**
BULK	**ISO 534**	**cm³/g**	**-**	**1,41**
WHITENESS (CIE)	**ISO 11475**	**%**	**3**	**142**
MOISTURE CONTENT	**ISO 287**	**%**	**1,0**	**7,0**

Special makings are available upon request.

RECYCLABLE · ECF ELEMENTAL CHLORINE FREE PULP · FREE ACID · 25/40 EN PPWR COMPLIANT · 22 PAP · FSC www.fsc.org FSC® C001810 The mark of responsible forestry

FAVINI

e-mail: rossano@favini.com
Website: www.favini.com

Technical Data Sheet | 18.11.2026

PRINTING AND FINISHING RECCOMENDATIONS

INKS
To ensure good drying, Cover Line papers should be printed with oxidizing inks, preferably new and undiluted. The drying process can be slightly accelerated by adding extra desiccant.

PRINTING PRESSURE
The embossing requires proper printing pressure settings.

BLANKETS
For a good graphic impression, use compressible blankets.

DRYING TIME
After printing, make small sheet pallets and allow 24 hours drying time.

PLASTIC LAMINATING
A previous assessment for plastic lamination is suggested due to possible incomplete adhesion of the film to the embossed surface.

PRINTABILITY AND RUNNABILITY
Every method of printing is possible including thermography, silk screen, UV varninishing and hot foil. Excellent results in the processing operations such as punching, blind embossing, punching, die cutting and creasing.

NOTE
Due to its hygroscopic nature, paper can show curl issues if not conditioned properly. To avoid any issue, we recommend to store the paper closed in its original wrap inside the printing area for at least 24-48 hours. After this conditioning time, the wrapping can be open and the paper can be utilized.

> Please contact our technical department for further suggestions.

ROSSANO VENETO MILL IS:

REACH COMPLIANT

MILL ACCREDITATION | Rossano Veneto VI - Italy

CORPORATE QUALITY MANAGEMENT STANDARD | UNI EN ISO 9001

ENVIRONMENTAL MANAGEMENT STANDARD | UNI EN ISO 14001

OCCUPATIONAL HEALTH AND SAFETY MANAGEMENT STANDARD | UNI EN ISO 45001

ECO-MANAGEMENT AND AUDIT SCHEME CE 1221/2009 | EMAS

We care about the environment: www.favini.com/en/sustainability