FAVINI

e-mail: rossano@favini.com
Website: www.favini.com

Technical Data Sheet | 18.11.2026

LIGHTSET

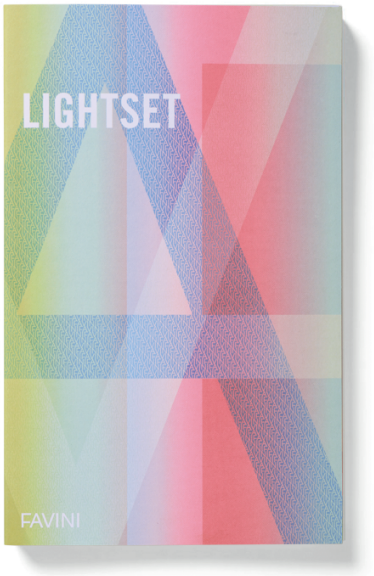

PRODUCT DESCRIPTION

Lighset is the new range of coloured papers by Favini. It is produced with virgin fibres and high-yield pulp and it is available in 10 colours and 2 sizes.

TECHNICAL DATA

	METHOD		+/-	80 g/m²
BASIC WEIGHT	ISO 536	g/m²	5%	80
CALIPER	ISO 534	µm	5%	102
BULK	ISO 534	cm²/g	-	1,28
ROUGHNESS (BENDTSEN)	ISO 8791-2	%	60	280
MOISTURE CONTENT	ISO 287	%	1	5,5

Fabbricazioni speciali disponibili su richiesta.

RECYCLABLE

ECF ELEMENTAL CHLORINE FREE PULP

FREE ACID

25/40 EN PPWR COMPLIANT

22 PAP

FAVINI

e-mail: rossano@favini.com
Website: www.favini.com

Technical Data Sheet | 18.11.2026

PRINTING AND FINISHING RECCOMENDATIONS

INKS
To ensure good drying, Lightset papers should be printed with good quality semi-fresh inks. The drying process can be slightly accelerated by adding extra desiccant.

BLANKETS
For a good graphic impression, use compressible blankets.

DRYING TIME
Allow 24 hours drying time after printing.

PRINTABILITY AND RUNNABILITY
Every method of printing, embossing, punching, die cutting, creasing, laminating and UV varnishing is possible.

LASER PRINTING
Lighset is laser-printing guaranteed.

NOTE
Due to its hygroscopic nature, paper can show curl issues if not conditioned properly. To avoid any issue, we recommend to store the paper closed in its original wrap inside the printing area for at least 24-48 hours. After this conditioning time, the wrapping can be open and the paper can be utilized.

> Please contact our technical department for further suggestions.

ROSSANO VENETO MILL IS:

REACH COMPLIANT

MILL ACCREDITATION | Rossano Veneto VI - Italy

CORPORATE QUALITY MANAGEMENT STANDARD | UNI EN ISO 9001

ENVIRONMENTAL MANAGEMENT STANDARD | UNI EN ISO 14001

OCCUPATIONAL HEALTH AND SAFETY MANAGEMENT STANDARD | UNI EN ISO 45001

ECO-MANAGEMENT AND AUDIT SCHEME CE 1221/2009 | EMAS

We care about the environment: www.favini.com/en/sustainability